

Diamond Power® UtiliCam® AT IV

Advanced Technology Infrared Camera for Utility Boilers

The Diamond Power® UtiliCam® AT IV solid-state infrared camera system from Babcock & Wilcox (B&W) produces 640 x 480 line resolution to deliver powerful images of boiler operations to better detect and prevent potentially costly damage. Our state-of-the-art camera system provides a wide field-of-view, allowing greater boiler coverage with fewer cameras for improved monitoring and reduced capital costs.

Benefits

Improved boiler monitoring


The UtiliCam AT IV infrared camera system uses an optimum wavelength to penetrate fume for better, more accurate monitoring of the utility boiler. Using the superior images delivered by the UtiliCam AT IV system, you can identify potential problems, control the boiler and optimize furnace operation quickly and easily.

Reduced operating and maintenance costs over conventional older style lens tube camera systems

The UtiliCam AT IV infrared camera system reduces maintenance hours as compared to conventional older style lens tube camera systems. The newly designed optical probe has encased optics that are keyed for correct position internal to probes and has no loose components which could fall out and break during cleaning. There are minimal parts to handle, and each optical probe is environmentally sealed for maximum protection and shock resistance.



View of the superheater from the Diamond Power UtiliCam AT IV camera system.

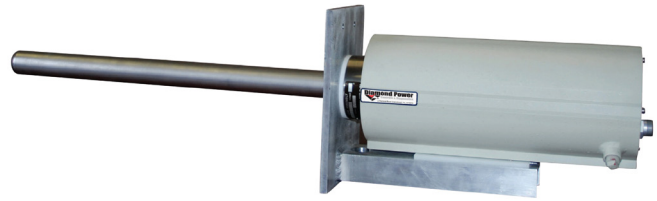

B&W's Diamond Power UtiliCam AT IV camera system is completely solid state. The system can include an optional pneumatic or electric retraction device to protect the camera against high temperatures in the event of low cooling air pressure.

System Contents

The UtiliCam AT IV infrared camera system includes a solid-state infrared camera, a monitor, an air system for cooling the camera assembly and optical probe, an optional pneumatic or electric retract and control unit.

Features

- Retract system option protects the air-cooled camera assembly from air system failure
- 103° diagonal field-of-view
- 1.5 in. (3.81 cm) outer optical probe diameter
- Easily retrofits to existing UtiliCam AT III IR camera systems
- Color options to further improve monitoring capabilities
- Produces 640 x 480 line resolution
- Dual-walled constructed housing
- Uses water or air cooling
- Networking capabilities available
- Improved front objective lens and outer stainless steel shroud nozzle for better air flow and reduced buildup

continued ►

Technical Specifications

Air requirements	Camera housing assembly	60 to 80 psi (414 to 551 kPa) @ 15-20 scfm (0.009 m ³ /s) max.; instrument or filtered plant air
	Optical probe	15 to 20 psi (103 to 138 kPa) @ 38 to 43 scfm (0.017 to 0.020 m ³ /s); based on instrument or filtered plant air at 90 to 100F (32.2 to 37.8C) ambient
Air connections	Filtered air system	0.5 in. (1.27 cm) NPT pipe
Camera assembly	Available lengths	24 in. (60.9 cm), 36 in. (91.4 cm), 48 in. (121.9 cm) or 60 in. (152.4 cm)
	Optical probe outer diameter	1.5 in. (3.81 cm) material 316L SST
	Weight (including lens tube)	24 in. (60.96 cm) unit: 23.5 lb (10.6 kg) 36 in. (91.44 cm) unit: 26 lb (11.8 kg) 48 in. (121.9 cm) unit: 28.5 lb (12.9 kg) 60 in. (152.4 cm) unit: 31 lb (14 kg)
Retract control unit	Material	NEMA-rated enclosure. Weight: 12 lb (5.4 kg)
Operating temperatures	Camera assembly ambient	200F (93.3C)
	Maximum internal furnace temperature	3000F (1648C)
Electric retract assembly	Activated by low-pressure switch on air supply	
	Weight	Approx. 85 lb (38.6 kg)
Power requirements	Camera housing	95 to 130 Vac, 47 to 63 Hz, 0.5A max. 240 Vac, 47 to 63 Hz with stepdown transformer
	Electric retract	102 to 130 Vac, 50/60 Hz



SCAN FOR MORE INFO
ON OUR WEBSITE

Babcock & Wilcox

1200 E Market Street, Suite 650
Akron, Ohio, U.S.A. 44305
Phone: +1 330.753.4511

www.babcock.com    

The information contained herein is provided for general information purposes only and is not intended nor to be construed as a warranty, an offer, or any representation of contractual or other legal responsibility.

Diamond Power and *UtiliCam* are trademarks of The Babcock & Wilcox Company.



ENERGY | ENVIRONMENTAL

Established in 1867, Babcock & Wilcox is a global leader in advanced energy and environmental technologies and services for the power, industrial and renewable markets.

For more information or to contact us, visit our website at www.babcock.com.